



**RHEY30-TV-VA**

Take-up housing unit

Take-up housing unit RHEY..-TV-VA, RIBB plastic

Technical information

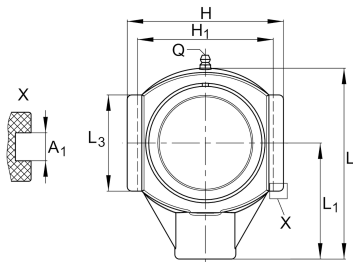

Your current product variant

| | | |
|-----------------------------|----|-------------------------------|
| Special material | TV | Plastic housing |
| Corrosion resistant bearing | VA | Corrosion-resistant VA design |
| Material | TV | Plastic |

Main Dimensions & Performance Data

| | | |
|----|---------|---------------------|
| d | 30 mm | Bore diameter |
| L | 125 mm | Length |
| M | 90 mm | Housing total width |
| ≈m | 0,67 kg | Weight |

Mounting dimensions

| | | |
|----------------|------------|-----------------------------------|
| L ₁ | 76 mm | Distance shaft axis |
| L ₃ | 63 mm | Length guidance grooves |
| K | M16 | Thread fixing bore |
| Q | 1/4-28 UNF | Connection thread for lubrication |

Dimensions

| | | |
|----------------|---------|---------------------------------|
| T | 40 mm | Height (housing, mounting side) |
| A ₂ | 34,5 mm | Width housing |



Additional information

| | |
|----------------------|---------------------|
| HE06-TV | Housing |
| GYE30-KRR-B-FA107-VA | Bearing designation |
| KASK06-S-G | End cap |
| KASK06-S-R-NBR | Open protecting cap |

Temperature range

| | | |
|------------------|--------|----------------------------|
| T _{min} | -20 °C | Operating temperature min. |
| T _{max} | 80 °C | Operating temperature max. |