
**EGS15260-E40-S3E** [↗](#)

## Strip

Strip, maintenance-free, material in accordance with ISO 3547-4, with steel backing

## Technical information

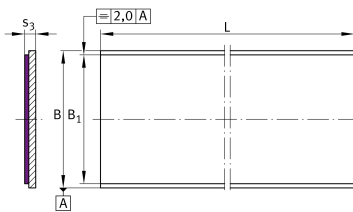

## Your current product variant

Maintenance	Maintenance free
-------------	------------------

## Main Dimensions &amp; Performance Data

s <sub>3</sub>	1,505 mm	Wall thickness
B	260 mm	Width
B <sub>1</sub>	243 mm	Minimum usable width
L	500 mm	Strip length
≈m	1,456 kg	Weight

## Dimensions

s <sub>3min</sub>	-0,05 mm	Wall thickness lower tolerance
s <sub>3max</sub>	0 mm	Wall thickness upper tolerance
B <sub>min</sub>	-2 mm	Width , lower tolerance
B <sub>max</sub>	2 mm	Width, upper tolerance
L <sub>min</sub>	0 mm	Total length lower tolerance
L <sub>max</sub>	3 mm	Total width upper tolerance

## Temperature range

T <sub>min</sub>	-200 °C	Operating temperature min.
T <sub>max</sub>	280 °C	Operating temperature max.



### Characteristics

---



Radial load



Lifetime lubrication, freedom from maintenance



Not sealed



Small design envelope