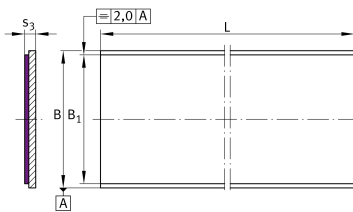
**EGS20260-E40-S3E** [↗](#)

Strip

Strip, maintenance-free, material in accordance with ISO 3547-4, with steel backing

Technical information

**Your current product variant**

| | |
|-------------|------------------|
| Maintenance | Maintenance free |
|-------------|------------------|

Main Dimensions & Performance Data

| | | |
|----------------|----------|----------------------|
| s ₃ | 2,005 mm | Wall thickness |
| B | 260 mm | Width |
| B ₁ | 243 mm | Minimum usable width |
| L | 500 mm | Strip length |
| ≈m | 1,966 kg | Weight |

Dimensions

| | | |
|-------------------|----------|--------------------------------|
| s _{3min} | -0,05 mm | Wall thickness lower tolerance |
| s _{3max} | 0 mm | Wall thickness upper tolerance |
| B _{min} | -2 mm | Width , lower tolerance |
| B _{max} | 2 mm | Width, upper tolerance |
| L _{min} | 0 mm | Total length lower tolerance |
| L _{max} | 3 mm | Total width upper tolerance |

Temperature range

| | | |
|------------------|---------|----------------------------|
| T _{min} | -200 °C | Operating temperature min. |
| T _{max} | 280 °C | Operating temperature max. |



Characteristics



Radial load



Lifetime lubrication, freedom from maintenance



Not sealed



Small design envelope