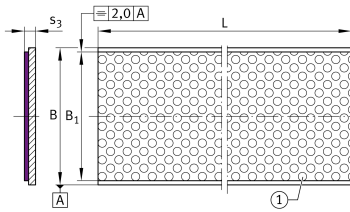
**EGS25200-E50**

## Strip

Strips, low-maintenance, material in accordance with ISO 3547-4, with steel backing

## Technical information

**Your current product variant**

Maintenance	Low-maintenance
-------------	-----------------

**Main Dimensions & Performance Data**

s <sub>3</sub>	2,46 mm	Wall thickness
B	200 mm	Width
B <sub>1</sub>	190 mm	Minimum usable width
L	500 mm	Strip length
≈m	1,598 kg	Weight

**Dimensions**

s <sub>3min</sub>	-0,04 mm	Wall thickness lower tolerance
s <sub>3max</sub>	0 mm	Wall thickness upper tolerance
B <sub>min</sub>	-2 mm	Width , lower tolerance
B <sub>max</sub>	2 mm	Width, upper tolerance
L <sub>min</sub>	0 mm	Total length lower tolerance
L <sub>max</sub>	3 mm	Total width upper tolerance

**Temperature range**

T <sub>min</sub>	-40 °C	Operating temperature min.
T <sub>max</sub>	110 °C	Operating temperature max.



### Characteristics

---

-  Radial load
-  Grease Lubrication
-  Not sealed
-  Small design envelope