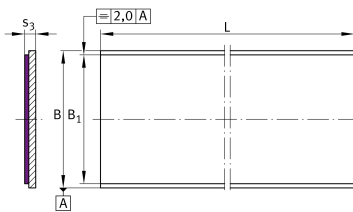
**EGS25260-E40-S3E** [↗](#)

Strip

Strip, maintenance-free, material in accordance with ISO 3547-4, with steel backing

Technical information

**Your current product variant**

Maintenance	Maintenance free
-------------	------------------

Main Dimensions & Performance Data

s ₃	2,505 mm	Wall thickness
B	260 mm	Width
B ₁	243 mm	Minimum usable width
L	500 mm	Strip length
≈m	2,463 kg	Weight

Dimensions

s _{3min}	-0,05 mm	Wall thickness lower tolerance
s _{3max}	0 mm	Wall thickness upper tolerance
B _{min}	-2 mm	Width , lower tolerance
B _{max}	2 mm	Width, upper tolerance
L _{min}	0 mm	Total length lower tolerance
L _{max}	3 mm	Total width upper tolerance

Temperature range

T _{min}	-200 °C	Operating temperature min.
T _{max}	280 °C	Operating temperature max.



Characteristics



Radial load



Lifetime lubrication, freedom from maintenance



Not sealed



Small design envelope