




VUS26126-A

Adjusting gib

Technical information





Your current product variant

Size code	26126
Version	A

Main Dimensions & Performance Data

L	137 mm	Length max
H	25 mm	Height min
B	39,5 mm	Width
≈m	0,89 kg	Weight

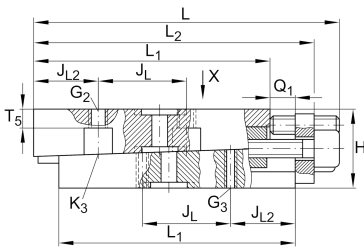

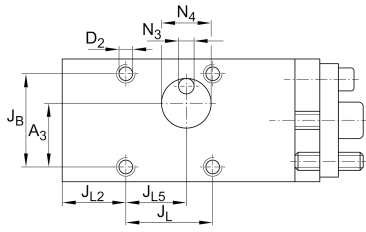

Mounting dimensions

L ₁	115 mm	
L ₂	129 mm	Max
J _B	30 mm	
Tol J _B	+ 0,1 mm	Upper tolerance
Tol J _B	- 0,1 mm	Lower tolerance
J _L	68 mm	
Tol J _L	+ 0,1 mm	Upper tolerance
Tol J _L	- 0,1 mm	Lower tolerance
J _{L2}	20,5 mm	
J _{L5}	39,5 mm	
Q ₁	8 mm	Max
A ₃	20,5 mm	
N ₃	5 mm	
N ₄	16 mm	
T ₅	6 mm	



Additional information

S ₁	6 mm	Adjustment screw hexagon socket
S ₂	3 mm	Locking/extraction screw hexagon socket
G ₂	M6	Fixing screws DIN ISO4762-12.9
M _A G ₂	17 Nm	Tightening torque
G ₃	M4	Fixing screws DIN ISO4762-12.9
M _A G ₃	5 Nm	Tightening torque
K ₃	M4	Fixing screws DIN ISO4762-12.9
M _A K ₃	5 Nm	Tightening torque
D ₂	4,9 mm	Core hole
Δh	0,4 mm	Adjustment max
	0,05 mm	Adjustment per screw revolution

Related products

RUS26126

For linear roller bearing