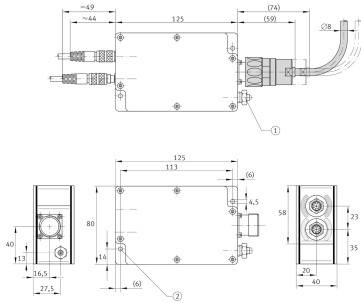


**MEKOBX-B**

evaluation electronics

evaluation electronics

Technical information**Digital Output**

| | | |
|----|------------------------------------|----------------------|
| | SIN COS 1Vpp + reference signal | Electronic interface |
| ≈m | 250 g | Weight |

Power Supply

| | | |
|--|--------|---------------------|
| | 5 V DC | Supply voltage |
| | 200 mA | Current consumption |

Main dimensions

| | | |
|--|--------|---------------------------------|
| | 125 mm | Length MEKOBX (excluding plugs) |
| | 80 mm | Width MEKOBX |
| | 40 mm | Height MEKOBX |
| | 236 mm | Length MEKOBX (total) |

Temperature range

| | | |
|--|-------|----------------------------|
| | IP65 | Ingress protection |
| | 70 °C | Operating temperature max. |
| | 0 °C | Operating temperature min. |

Additional information

| | | |
|--|-------------------|------------------------|
| | ISO4762 M4X10-8.8 | Cap head screws MEKOBX |
|--|-------------------|------------------------|



View product details on medias

15.06.2026, 12:18:43 UTC

SCHAEFFLER

Cable

| | |
|-------|----------------------------|
| M23x1 | Thread plug connector |
| 12 | Number pins plug connector |