**KGBS20-PP-AS**

## Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit;  
adjustable, sealed, greased, with relubrication  
facility; corrosion-resistant design possible

## Technical information

## Your current product variant




Size Code	20
Seal	PP
Relubrication facility	AS

## Technical data

	6	Ball rows
≈m	0,3 kg	Weight

## Main Dimensions &amp; Performance Data

F <sub>W</sub>	20 mm	Diameter of ball complement
H	47,5 mm	Height
L	45 mm	Length
Tol L	h12	Tolerance
B	70 mm	Width
C	1.570 N	Dynamic load rating
C <sub>0</sub>	1.230 N	Load capacity stat. C <sub>0</sub>

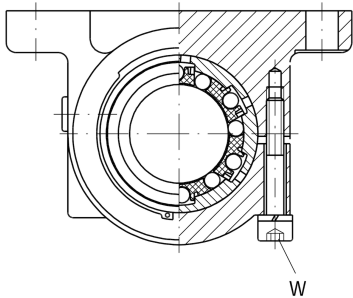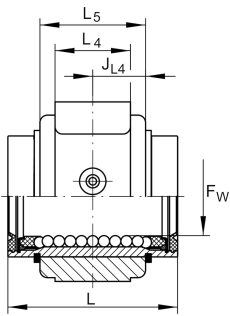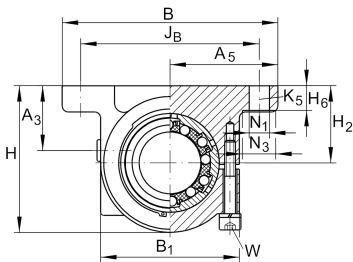



### Mounting dimensions

J <sub>B</sub>	58 mm	
Tol J <sub>B</sub>	+ 0,15 mm	Upper tolerance
Tol J <sub>B</sub>	- 0,15 mm	Lower tolerance
B <sub>1</sub>	45 mm	
A <sub>5</sub>	35 mm	
Tol A <sub>5</sub>	+ 0,02 mm	Upper tolerance
Tol A <sub>5</sub>	- 0,02 mm	Lower tolerance
L <sub>4</sub>	20 mm	Distance
L <sub>5</sub>	28 mm	Distance
J L <sub>4</sub>	14 mm	Distance
H <sub>2</sub>	25 mm	Height shaft
Tol H <sub>2</sub>	+ 0,015 mm	Upper tolerance
Tol H <sub>2</sub>	- 0,015 mm	Lower tolerance
A <sub>3</sub>	21 mm	
H <sub>6</sub>	8 mm	
N <sub>1</sub>	6,6 mm	
N <sub>3</sub>	11 mm	
K <sub>5</sub>	M6	
K <sub>8</sub>	NIPA1	Lubrication nipple
W	3 mm	Width across flats