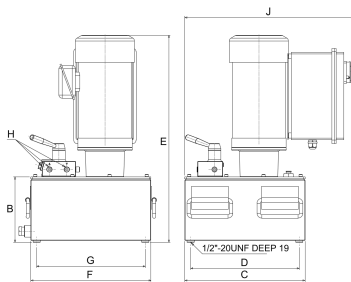


**EP-320S-HN-SET**

Hydraulic pump, electric

BETEX EP-320, 700 bar, usable oil volume 18 l, in set with pressure gauge, T-piece, hose, couplings and wooden crate

Technical information

**Your current product variant**

Series	EP	Electric pump
Version	HN	For use with hydraulic nuts

Technical data

P max	700 bar	Maximum operating pressure
\dot{V}_{H0}	9.500 cm ³	Flow rate/minute, without load
\dot{V}_{H350}	980 cm ³	Flow rate/minute @ 350 bar
\dot{V}_{H700}	900 cm ³	Flow rate/minute @ 700 bar
V max	20 l	Volume of oil container
V eff	18 l	Useable oil quantity
	2 pos./2-way	Valve type
	Hold/reverse	Valve function
	Quick coupling G $\frac{1}{4}$	Coupling
U	400 V	Operating voltage
f	50 – 60 Hz	Power frequency
I	5 A	Amperage
	three-phase	Motor type
P M	1,48 kW	Motor power
	≈ 80 dB	Noise level @ 700 bar
	56 kg	Weight pump
≈m	67,1 kg	Weight



Dimensions

B	198,5 mm
C	365 mm
D	330 mm
E	627,5 mm
F	365 mm
G	330 mm
H	3/8" NPT
J	512 mm

Additional information

Motor thermally protected, remote control with 3 m cable, automatic overload valve (700 bar)	Product specifics
preferably in combination with hydraulic nuts HYDNUT	Use

Related products

HYDNUT..E HYDNUT..E-INCH HYDNUT..HEAVY
--