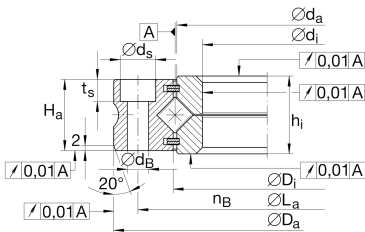


**XV60** **Crossed roller bearing**

Crossed roller bearings without gear teeth,
lamellar seals on both sides

Technical information**Main Dimensions & Performance Data**

d_1	60 mm	Bore Diameter
	0,013 mm	Bore diameter upper tolerance
	-0,006 mm	Bore diameter lower tolerance
D_a	110 mm	Outside Diameter
	0 mm	Outside diameter upper tolerance
	-0,022 mm	Outside diameter lower tolerance
h_i	17 mm	Height inner ring
$\approx m$	0,687 kg	Weight

Dimensions

D_i	74,5 mm	Inner diameter outer ring
d_a	73,5 mm	Outer diameter inner ring
H_a	16 mm	Width outer ring
L_a	95 mm	Pitch circle diameter fixing holes
n_B	16	Quantity of fixed holes evenly around the circumference
d_B	5,6 mm	Diameter fixing hole outer ring
d_S	10 mm	Countersunk diameter of fixing holes
t_S	5,4 mm	Countersunk depth of fixing holes



Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	80 °C	Operating temperature max.

Calculation factors

	0,01 mm	Running accuracy, radial
	0,01 mm	Running accuracy, axial
C_a	21.700 N	Basic dynamic load rating, axial
C_{0a}	61.000 N	Basic static load rating, axial
C_r	15.500 N	Basic dynamic load rating, radial (for radial load only)
C_{0r}	29.500 N	Basic static load rating, radial (for radial load only)
$F_{r \text{ zul.}}$	10.900 N	Max. radial load screws (frictional contact)
N_G Grease	1.032 1/min	Limiting speed for grease lubrication with normal clearance
N_G Grease	516 1/min	Limiting speed for grease lubrication with preload

Characteristics

	Radial load
	Axial load in one direction
	Axial load in two directions
	Moments about all axes
	Grease Lubrication
	Sealed on both sides
	Small design envelope