


**FAG****QJ252-N2-MPA-J30PC-C3**

Four-point contact bearing

Four point contact bearing QJ2..-N2-MPA,
holding grooves, solid brass cage

Technical information

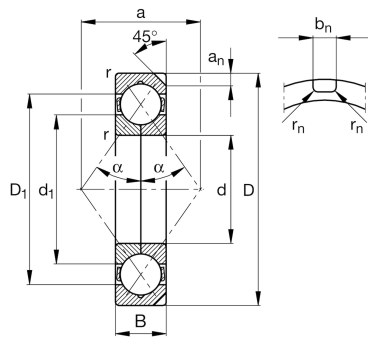

Your current product variant

Design, bearing outer ring	N2	Two retaining grooves in the outer ring on one side
Tolerance class	PN	Normal (ISO 492:2023)
Cage	MPA	Solid brass cage, outer ring guided
Dimensional / heat stabilization	S1	Rings dimensional stabilized up to 200°
Coating	J30##	Bearing or components burnished
Axial internal clearance	C3	Group 3 (C3), bigger than CN

Main Dimensions & Performance Data

d	260 mm	Bore diameter
D	480 mm	Outside diameter
B	80 mm	Width
C _r	840.000 N	Basic dynamic load rating, radial
C _{0r}	1.630.000 N	Basic static load rating, radial
C _{ur}	47.000 N	Fatigue load limit, radial
n _G	2.320 1/min	Limiting speed
n _{gr}	1.080 1/min	Reference speed
≈m	69,2 kg	Weight

Mounting dimensions

d _{a min}	280 mm	Minimum diameter shaft shoulder
D _{a max}	460 mm	Maximum diameter of housing shoulder
r _{a max}	4 mm	Maximum fillet radius










Dimensions

r_{min}	5 mm	Minimum chamfer dimension
D_1	401,8 mm	Shoulder diameter outer ring
d_1	338,4 mm	Shoulder diameter inner ring
a	259,1 mm	Distance between the apexes of the pressure cones
a_n	15 mm	Hight retaining slot
b_n	12,5 mm	Width retaining slot
r_n	2,5 mm	Radius retaining slot
	45 °	Angle retaining slot
α	35 °	Contact angle

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	200 °C	Operating temperature max.

Characteristics

-  F_r Radial load
-  F_a Axial load in one direction
-  F_a Axial load in two directions
-  Grease Lubrication
-  Oil Lubrication
-  Not sealed
-  Large bearing