


**YRTCM1200-XL**

## Axial/radial roller bearing




Axial / radial roller bearing. Double direction, screw mounting, with integrated incremental angle measuring ring

## Technical information

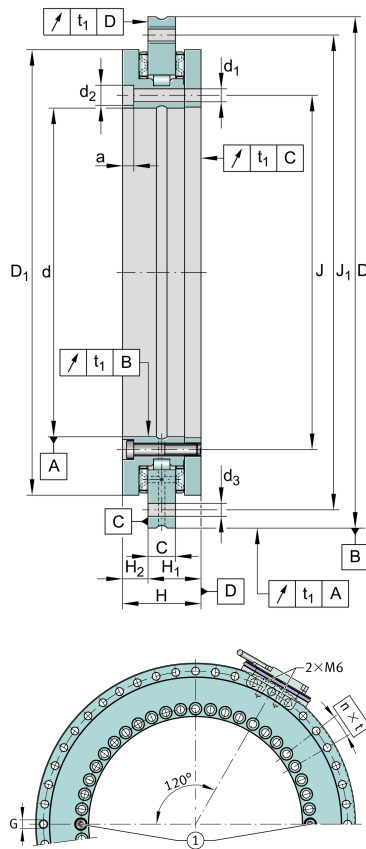

## Main Dimensions &amp; Performance Data

d	200 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,015 mm	Bore diameter lower tolerance
D	300 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0,018 mm	Outside diameter lower tolerance
H	51 mm	Height
C <sub>r</sub>	123.000 N	Basic dynamic load rating, radial
C <sub>0r</sub>	275.000 N	Basic static load rating, radial
C <sub>a</sub>	147.000 N	Basic dynamic load rating, axial
C <sub>0a</sub>	850.000 N	Basic static load rating, axial
n <sub>G</sub>	450 1/min	Limiting speed
M <sub>R</sub>	6 Nm	Bearing friction torque at 5 1/min
m	10,4 kg	Weight



### Mounting dimensions

J	215 mm	Pitch circle diameter fixing holes in inner ring
J <sub>1</sub>	285 mm	Pitch circle diameter fixing holes in outer ring
d <sub>1</sub>	7 mm	Fixing holes diameter inner ring
d <sub>2</sub>	11 mm	Counterbore diameter of fixing holes
a	6,2 mm	Counterbore depth of fixing holes
	46	Quantity of fixing holes inner ring
d <sub>3</sub>	7 mm	Fixing holes diameter outer ring
	45	Quantity of fixing holes outer ring
n	48	Pitch quantity
t	7,5 °	Pitch separation angle
G	M8	Threaded extraction hole
	3	Quantity of threaded extraction hole
M <sub>A</sub>	14 Nm	Screw tightening torque
	2	Quantity of retaining screws
t <sub>1</sub>	4 μm	Axial and radial runout, measurement standard; Measured on mounted bearing, with ideal adjacent construction.

### Dimensions

H <sub>1</sub>	30 mm	Height contact face outer ring
	0,03 mm	Height contact face outerring H1 upper tolerance
	-0,03 mm	Height contact face outerring H1 lower tolerance
H <sub>2</sub>	21 mm	Height contact face outer ring
	0,03 mm	Height contact face outerring H2 upper tolerance
	-0,03 mm	Height contact face outerring H2 lower tolerance
D <sub>1 max</sub>	274,4 mm	Maximum diameter inner ring
C	15 mm	Width of outer ring









### Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.

### Additional information

$c_{aL}$	9.800 N/ $\mu\text{m}$	Axial rigidity of bearing position
$c_{rL}$	5.700 N/ $\mu\text{m}$	Radial rigidity of bearing position
$c_{kL}$	64.000 Nm/mrad	Tilting rigidity of bearing position
$c_{aW}$	15.500 N/ $\mu\text{m}$	Axial rigidity of rolling element set
$c_{rW}$	6.200 N/ $\mu\text{m}$	Radial rigidity of rolling element set
$c_{kW}$	128.000 Nm/mrad	Tilting rigidity of rolling element set

### Characteristics

	Radial load
	Axial load in one direction
	Axial load in two directions
	Moments about all axes
	Grease Lubrication
	Not sealed