




**GE710-DW-2RS2-XL**

Spherical plain bearing

Large radial spherical plain bearing, maintenance-free, sliding layer: ELGOGLIDE, inner ring curved surface with hard chromium coating, DIN ISO 12240-1, dimension series C, sealed

X-life

Technical information

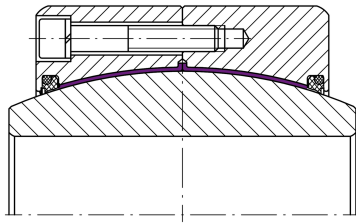

Your current product variant

Maintenance	Maintenance free
Sealing	2RS2 Lip seals with increased sealing action on both sides
Bore lining	Without
Coating	Without
Fabric	ELGOGLIDE
Material	Steel

Main Dimensions & Performance Data

d	710 mm	Bore diameter bearing
C _r	60.900.000 N	Basic dynamic load rating, radial
D	950 mm	Outside diameter bearing
B	325 mm	Width inner ring
C	275 mm	Width Outer ring
C _{0r}	101.000.000 N	Basic static load rating, radial
≈m	688,5 kg	Weight



Mounting dimensions

$r_{1\text{min}}$	3 mm	Edge Spacing
$r_{2\text{min}}$	6 mm	Edge Spacing
D_{amin}	789 mm	Housing Connection Diameter
d_{amax}	763,7 mm	Connection measurement, inner ring

Dimensions

d_{κ}	830 mm	Ball diameter
α	3,7 °	Tilt angle
D_{OT}	0 mm	Outside diameter, upper tolerance
D_{UT}	-0,1 mm	Outside diameter, lower tolerance
B_{OT}	0 mm	Width inner ring, upper tolerance
d_{UT}	-0,075 mm	Bore diameter bearing, lower tolerance
B_{UT}	-0,75 mm	Width inner ring, lower tolerance
d_{OT}	0 mm	Bore diameter bearing, upper tolerance
C_{OT}	0 mm	Width outer ring, upper tolerance
C_{UT}	-1,2 mm	Width outer ring, lower tolerance
G_{r}	0 - 0,17	Radial Clearance
G_{rmax}	0,17 mm	Radial clearance, maximum
G_{rmin}	0 mm	Radial clearance, minimum

Temperature range

T_{min}	-40 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.



Characteristics



Radial load



Axial load in one direction



Axial load in two directions



Lifetime lubrication, freedom from maintenance



Sealed on both sides



Large bearing



Static angular error and misalignment



Dynamic angular error and misalignment