


**GE160-LO**

## Spherical plain bearing

High performance Radial spherical plain bearing, requiring maintenance, sliding contact surface: steel/steel, DIN ISO 12240-1, dimension series W, cylindrical extensions on inner ring, open design High-performance: For highest load rating and lifetime demands

## Technical information

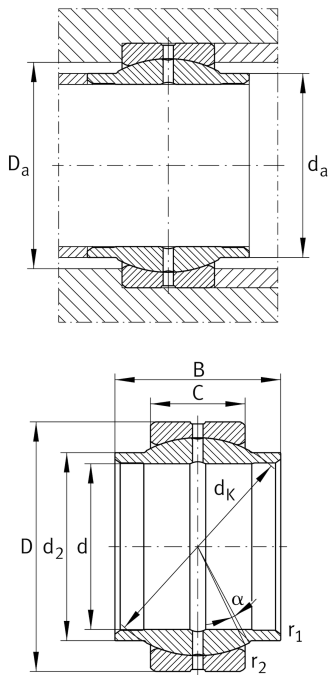

## Your current product variant

Maintenance	Maintenance required
Material	Steel
Type of Seal	Without
Radial internal clearance	CN (Group N) Normal internal clearance
Coating	Durotect M Inner- and outer ring coated with Durotect M (Manganese Phosphate)

## Main Dimensions &amp; Performance Data

d	160 mm	Bore diameter bearing
D	230 mm	Outside diameter bearing
B	160 mm	Width inner ring
C <sub>r</sub>	1.770.000 N	Basic dynamic load rating, radial
C <sub>0r</sub>	6.800.000 N	Basic static load rating, radial
≈m	16,2 kg	Weight

## Mounting dimensions

r <sub>1smin</sub>	1 mm	Edge Spacing
r <sub>2smin</sub>	1 mm	Edge Spacing
d <sub>a max</sub>	177 mm	Connection measure Inner ring
D <sub>a min</sub>	191 mm	Housing Connection Diameter



## Dimensions

C	80 mm	Width Outer ring
$d_K$	200 mm	Ball diameter
$\alpha$	4 °	Tilt angle
$d_{OT}$	0,04 mm	Bore diameter bearing, upper tolerance
$d_{UT}$	0 mm	Bore diameter bearing, lower tolerance
$D_{OT}$	0 mm	Outside diameter, upper tolerance
$D_{UT}$	-0,03 mm	Outside diameter, lower tolerance
$B_{OT}$	0 mm	Width inner ring, upper tolerance
$B_{UT}$	-0,4 mm	Width inner ring, lower tolerance
$C_{OT}$	0 mm	Width outer ring, upper tolerance
$C_{UT}$	-0,6 mm	Width outer ring, lower tolerance
$G_r$	0,1 - 0,192	Radial Clearance
$G_{rmax}$	0,192 mm	Radial clearance, maximum
$G_{rmin}$	0,1 mm	Radial clearance, minimum

## Temperature range

$T_{min}$	-60 °C	Operating temperature min.
$T_{max}$	200 °C	Operating temperature max.

## Characteristics

	Radial load
	Axial load in one direction
	Axial load in two directions
	Grease Lubrication
	Not sealed
	Static angular error and misalignment
	Dynamic angular error and misalignment