

**FAG****HCM7014-C-T-P4S-UL-XL**

## High speed spindle bearing


High speed spindle bearing HCM70..-C, adjusted, in pairs or sets, contact angle  $\alpha = 17^\circ$ , with ceramic balls, restricted tolerances

## Technical information




## Your current product variant

Contact angle	Contact angle 17°	Contact angle 17°
Type of Seal	Without	Not sealed
Cage	T	Laminated fabric cage
Tolerance class	P4S	Tolerance class P4S, FAG standard better than P4 to DIN 620
Arrangement bearing set	U	Single bearing
Preload	L	Preload light

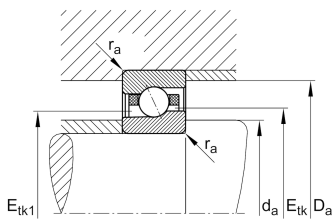

## Main Dimensions &amp; Performance Data

d	70 mm	Bore diameter
D	110 mm	Outside diameter
B	20 mm	Width
C <sub>r</sub>	27.500 N	Basic dynamic load rating, radial
C <sub>0r</sub>	15.800 N	Basic static load rating, radial
C <sub>ur</sub>	1.270 N	Fatigue load limit, radial
n <sub>G Grease</sub>	22.000 1/min	Limiting speed for grease lubrication
n <sub>G Oil</sub>	34.000 1/min	Limiting speed for oil lubrication
≈m	0,559 kg	Weight

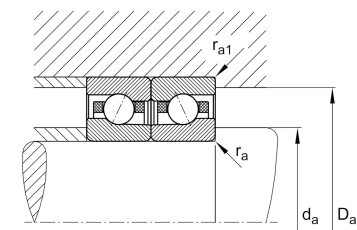



### Mounting dimensions

$d_a$	77 mm	Diameter shaft shoulder
$d_a$	h12	Diameter shaft shoulder clearance
$D_a$	102 mm	Shoulder diameter outer ring
$D_a$	H12	Shoulder diameter outer ring clearance
$r_{a \max}$	1 mm	Maximum recess radius
$r_{a1 \max}$	0,6 mm	Maximum recess radius
$E_{tk \min}$	84,3 mm	Minimum diameter injection pitch
$E_{tk \max}$	87,2 mm	Maximum diameter injection pitch
$E_{tk1 \min}$	80,7 mm	Minimum diameter injection pitch
$E_{tk1 \max}$	87,2 mm	Maximum diameter injection pitch
$a$	23,8 mm	Distance between the apexes of the pressure cones

### Dimensions

$r_{\min}$	1,1 mm	Minimum chamfer dimension
$r_{1 \min}$	0,6 mm	Minimum chamfer dimension
$\alpha$	17 °	Contact angle

### Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	100 °C	Operating temperature max.



### Additional information

$F_{VL}$	122 N	Preload force light
$F_{VM}$	322 N	Preload force medium
$F_{VH}$	675 N	Preload force heavy
$K_{aEL}$	355 N	Lift-off force light
$K_{aEM}$	958 N	Lift-off force medium
$K_{aEH}$	2.069 N	Lift-off force heavy
$c_{aL}$	68 N/ $\mu$ m	Axial rigidity light
$c_{aM}$	97 N/ $\mu$ m	Axial rigidity medium
$c_{aH}$	131 N/ $\mu$ m	Axial rigidity heavy

### Characteristics

-  Radial load
-  Axial load in one direction
-  Grease Lubrication
-  Oil Lubrication
-  Not sealed