
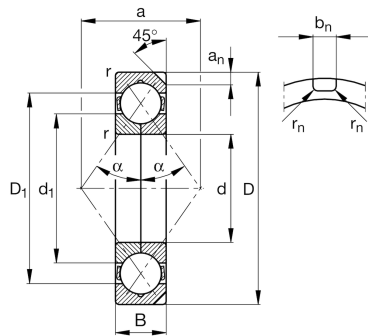
**FAG****QJ1048-N1-MPA-C3** [↗](#)

Four-point contact bearing

Four point contact bearing QJ10...-N1-MPA,  
holding groove, solid brass cage

## Technical information

**Your current product variant**

Design, bearing outer ring	N1	One retaining groove in the outer ring
Tolerance class	PN	Normal (ISO 492:2023)
Cage	MPA	Solid brass cage, outer ring guided
Dimensional / heat stabilization	S1	Rings dimensional stabilized up to 200°
Axial internal clearance	C3	Group 3 (C3), bigger than CN

**Main Dimensions & Performance Data**

d	240 mm	Bore diameter
D	360 mm	Outside diameter
B	56 mm	Width
C <sub>r</sub>	450.000 N	Basic dynamic load rating, radial
C <sub>0r</sub>	790.000 N	Basic static load rating, radial
C <sub>ur</sub>	25.500 N	Fatigue load limit, radial
n <sub>G</sub>	3.050 1/min	Limiting speed
n <sub>gr</sub>	1.530 1/min	Reference speed
≈m	21,4 kg	Weight

**Mounting dimensions**

d <sub>a min</sub>	252 mm	Minimum diameter shaft shoulder
D <sub>a max</sub>	348 mm	Maximum diameter of housing shoulder
r <sub>a max</sub>	2,5 mm	Maximum fillet radius



## Dimensions

$r_{\min}$	3 mm	Minimum chamfer dimension
$D_1$	319,6 mm	Shoulder diameter outer ring
$d_1$	282,25 mm	Shoulder diameter inner ring
$a$	210,1 mm	Distance between the apexes of the pressure cones
$a_n$	12,7 mm	Height retaining slot
$b_n$	10,5 mm	Width retaining slot
$r_n$	2 mm	Radius retaining slot
	45 °	Angle retaining slot
$\alpha$	35 °	Contact angle

## Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	200 °C	Operating temperature max.

## Characteristics



Radial load



Axial load in one direction



Axial load in two directions



Grease Lubrication



Oil Lubrication



Not sealed



Large bearing