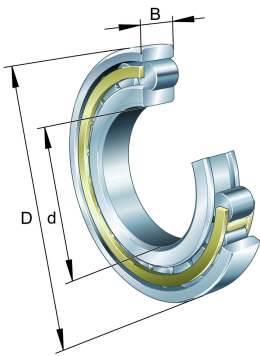


**FAG****N319-E-XL-M1** [↗](#)

## Cylindrical roller bearing

Cylindrical roller bearing N3..-E-M1, with cage, single row, non-locating bearing, 0 ribs on outer ring, 2 rib on inner ring, type N3

## Technical information

**Your current product variant**

Cage	M1	Two Piece Brass Cage Roller Guided
Tolerance class	PN	Normal (PN)
Change mark	E	Increased Capacity Design
Radial internal clearance	CN (Group N)	Normal internal clearance
Number of rows	1	Single-row design

**Main Dimensions & Performance Data**

d	95 mm	Bore diameter
D	200 mm	Outside diameter
B	45 mm	Width
C <sub>r</sub>	390.000 N	Basic dynamic load rating, radial
C <sub>0r</sub>	380.000 N	Basic static load rating, radial
C <sub>ur</sub>	65.000 N	Fatigue load limit, radial
n <sub>G Grease</sub>	5.200 1/min	Limiting speed for grease lubrication
n <sub>G Oil</sub>	6.100 1/min	Limiting speed for oil lubrication
m	6,9 kg	Weight

**Mounting dimensions**

d <sub>a</sub>	109 mm	Diameter shaft shoulder
D <sub>a</sub>	186 mm	Diameter of housing shoulder
r <sub>a1 max</sub>	2,5 mm	Maximum recess radius



### Dimensions

$r_{1 \text{ min}}$	3 mm	Minimum chamfer dimension
$s_1$	1,4 mm	Axial displacement
E	177,5 mm	Raceway diameter outer ring

### Temperature range

$T_{\text{min}}$	-30 °C	Operating temperature min.
$T_{\text{max}}$	150 °C	Operating temperature max.

### Characteristics

-  Radial load
-  Grease Lubrication
-  Oil Lubrication
-  Not sealed