


**YRTSMA395**

Axial/radial roller bearing

Axial/radial bearings, double direction, screw mounting, for higher speeds, with integrated absolute angular measuring system

Technical information

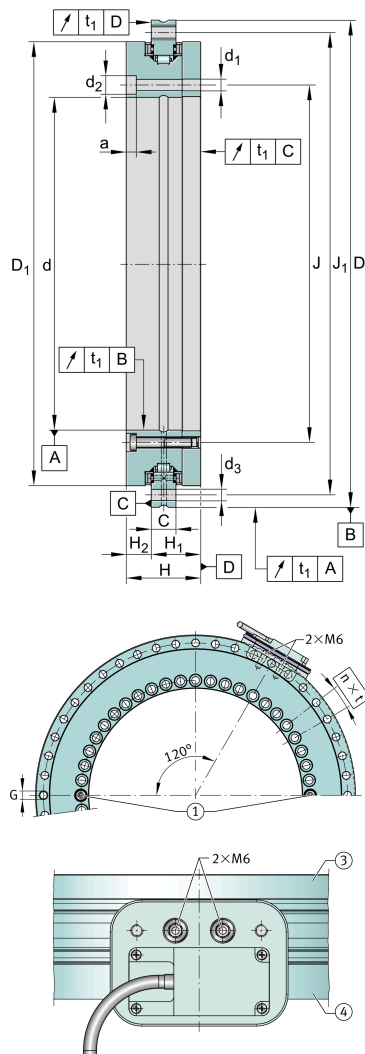

Your current product variant

Angular measuring system integrated	MA	with absolute angular measuring system
-------------------------------------	----	--

Main Dimensions & Performance Data

d	395 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,023 mm	Bore diameter lower tolerance
D	525 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0,028 mm	Outside diameter lower tolerance
H	65 mm	Height
C_r	121.000 N	Basic dynamic load rating, radial
C_{0r}	390.000 N	Basic static load rating, radial
C_a	214.000 N	Basic dynamic load rating, axial
C_{0a}	1.540.000 N	Basic static load rating, axial
n_G	650 1/min	Limiting speed
$\approx m$	32,2 kg	Weight



Mounting dimensions

J	415 mm	Pitch circle diameter fixing holes in inner ring
J ₁	505 mm	Pitch circle diameter fixing holes in outer ring
d ₁	9,3 mm	Fixing holes diameter inner ring
d ₂	15 mm	Counterbore diameter of fixing holes
a	8,2 mm	Counterbore depth of fixing holes
	46	Quantity of fixing holes inner ring
d ₃	9,3 mm	Fixing holes diameter outer ring
	45	Quantity of fixing holes outer ring
n	48	Pitch quantity
t	7,5 °	Pitch separation angle
G	M12	Threaded extraction hole
	3	Quantity of threaded extraction hole
M _A	34 Nm	Screw tightening torque
	2	Quantity of retaining screws
t ₁	6 μm	Axial and radial runout, measurement standard; Measured on mounted bearing, with ideal adjacent construction.

Dimensions

H ₁	42,5 mm	Height contact face outer ring
	0,06 mm	Height contact face outerring H1 upper tolerance
	-0,07 mm	Height contact face outerring H1 lower tolerance
H ₂	22,5 mm	Height contact face outer ring
D _{1 max}	487,7 mm	Maximum diameter inner ring
C	20 mm	Width of outer ring

Temperature range








T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.



Additional information

c_{aL}	14.000 N/ μ m	Axial rigidity of bearing position
c_{rL}	8.000 N/ μ m	Radial rigidity of bearing position
c_{kL}	351.000 Nm/mrad	Tilting rigidity of bearing position
c_{aW}	23.400 N/ μ m	Axial rigidity of rolling element set
c_{rW}	8.700 N/ μ m	Radial rigidity of rolling element set
c_{kW}	582.000 Nm/mrad	Tilting rigidity of rolling element set
M_m	4.254 kg*cm ²	Mass moment of inertia for rotating outer ring
M_m	8.352 kg*cm ²	Mass moment of inertia for rotating inner ring

Characteristics

-  Radial load
-  Axial load in one direction
-  Axial load in two directions
-  Moments about all axes
-  Grease Lubrication
-  Not sealed
-  Large bearing