



IMAGE  
COMING SOON**PBY30-XL**

Plummer block housing unit

Plummer block housing unit PBY...-XL, RIBB  
sheet metal PB

X-life

## Technical information

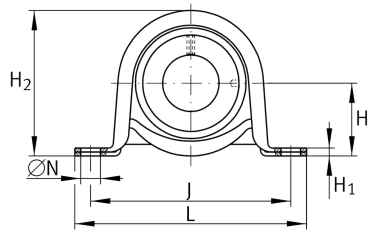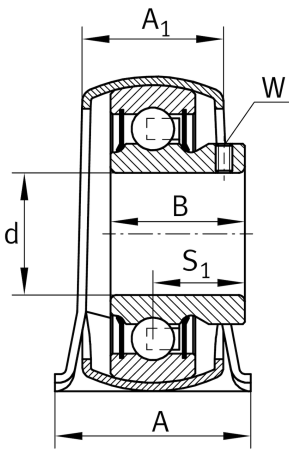

## Your current product variant

Material Steel sheet

## Main Dimensions &amp; Performance Data

d	30 mm	Bore diameter
L	117,5 mm	Length total
H <sub>2</sub>	66,1 mm	Height
C <sub>0r G</sub>	2.700 N	Load carrying capacity (housing)
C <sub>r</sub>	19.500 N	Basic dynamic load rating, radial
C <sub>0r</sub>	11.300 N	Basic static load rating, radial
≈m	0,39 kg	Weight

## Mounting dimensions

J	95 mm	Distance fixing bore
N	11,5 mm	Fixing bore

## Dimensions

H	33,3 mm	Distance shaft axis
A	38 mm	Width (base)
A <sub>1</sub>	26,5 mm	Width (head)
H <sub>1</sub>	4 mm	Height (base)



### Additional information

f <sub>0</sub>	13,8	Calculation factor
	GEH62-BT	Housing
	AY30-XL-NPP-B	Bearing designation

### Temperature range

T <sub>min</sub>	-20 °C	Operating temperature min.
T <sub>max</sub>	120 °C	Operating temperature max.