**PBS35-XL**

Plummer block housing unit

Plummer block housing units PBS, sheet steel housing, radial insert ball bearing with eccentric locking collar, P seals

X-life

Technical information

Your current product variant

Material	Steel sheet
----------	-------------

Main Dimensions & Performance Data



d	35 mm	Bore diameter
H ₂	94,4 mm	Height
L	165 mm	Length total
C _{0r} G	4.100 N	Load carrying capacity (housing)
≈m	1,01 kg	Weight

Mounting dimensions

J	127 mm	Distance fixing bore
N	13,5 mm	Width (slot)
N ₁	8 mm	Distance slot center
S	20,7 mm	Distance fixing

Dimensions

H	47,6 mm	Distance shaft axis
A	46,1 mm	Width (base)
A ₁	22,2 mm	Width (head)
H ₁	4 mm	Height (base)
P	35 mm	Distance support

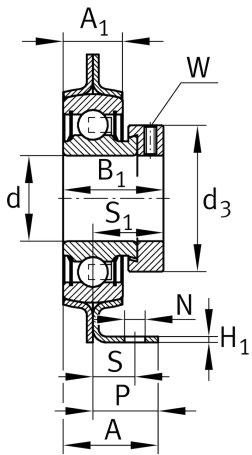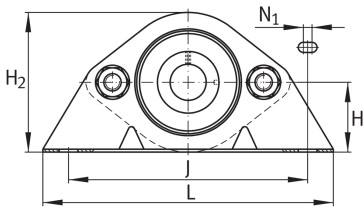



Additional information

GEH72-PBS	Housing
RAE35-XL-NPP-B	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.